

GP9200E

GP SERIES Portable Generator

Model 7970-0 UPC: 696471084436
(49-State)

Model 7971-0 UPC: 696471084443
(50-State)

Features


- **COsense® Technology** – STOPS, ALERTS, SAVES. Powerful protection against hazardous carbon monoxide.
- **Push Button Electric Start** with auto-choke provides reliable, hassle free start-ups (battery included).
- **PowerRush™ Advanced Technology** delivers over 30% more starting capacity allowing you to do more with less.*
- **Generac's OHV engine** with pressurized lubrication provides a long engine life.
- **Low-oil pressure shutdown** automatically safeguards engine from damage.
- **Large-capacity steel fuel tank** with incorporated fuel gauge provides durability and up to an 8.5 hour run-time at 50% load.
- **1 ¼" steel-tube cradle** for added durability and strength.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, never-flat wheels** allow for easy portability.
- **Fold-down locking handle** for sturdy portability and compact storage.
- **HomeLink™** manual transfer switch compatible for safe home backup power.

*Increases electrical current upon demand; above rated output when starting electric motors.



AC Rated Output Running Watts 9200
AC Maximum Output Starting Watts 11250

Control Panel

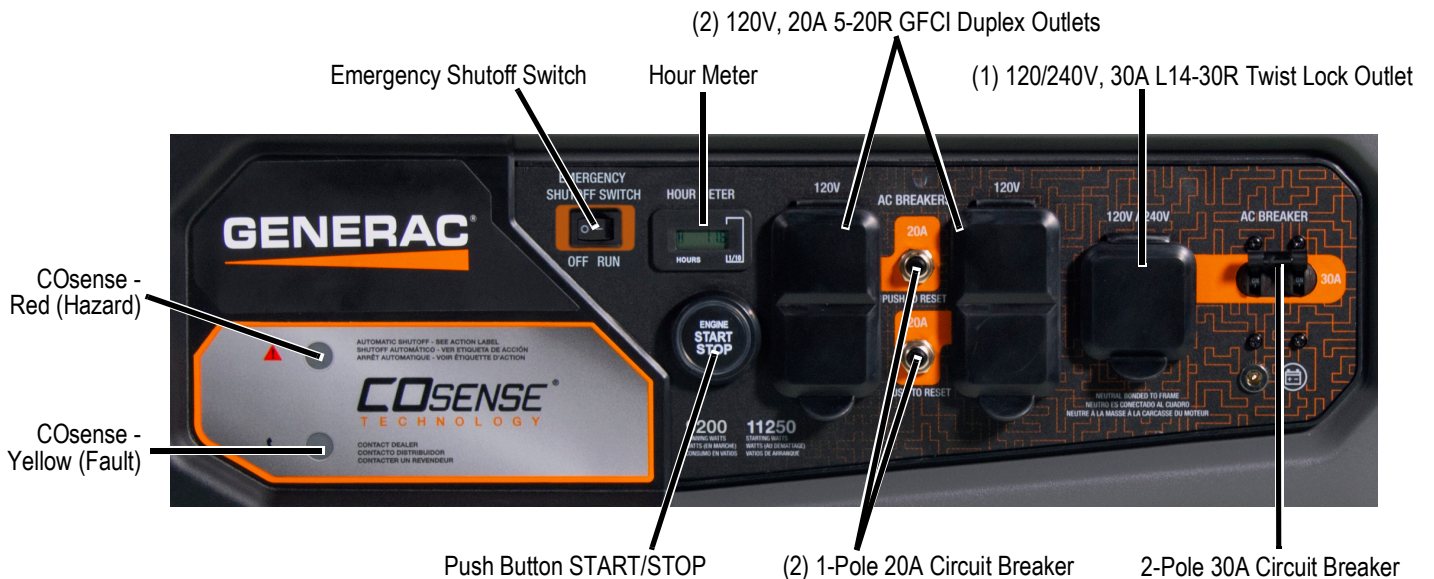

GP9200E

Specifications

Product Series	GP9200E
Model Number	7970-0 / 7971-0
Configuration	7970 (49 ST) / 7971 (50 ST)
AC Rated Output Running Watts	9200
AC Maximum Output Starting Watts	11250
Rated AC Voltage	120/240 VAC
Rated AC Frequency	60 Hz
Rated 120/240 VAC Amperage	76.7 / 38.3
Engine Displacement	459cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	10W-30 / SAE 30
Oil Capacity qt (L)	1.06 (1.0)
Lubrication Method	Pressure
Automatic Voltage Regulation (AVR)	Yes
Choke Location	On Engine
Fuel Shut Off	On Fuel Tank
Starting Method	Electric Start / Pull Start
Low Oil Pressure Shutdown	Yes

Neutral Bonded to Ground	Yes
Start Switch Type	Push Button
Start Switch Location	On Control Panel
Fuel Gauge	Yes
Fuel Tank Capacity gal (L)	7.9 (29.9)
Run Time at 50% of Rated Load (Hours)	8.5
Handle Style	Dual Grip, Single Folding with Lock Pin
Wheel Type	9.5" Never Flat
Warranty- Residential	3 Year Limited
Warranty- Commercial	1 Year Limited
Included	engine oil, oil funnel, handle & wheel kit, owner's manual, charging cable, 20ft power cord

Dimensions and Weights

Length in (mm)	27.2 (692)
Width in (mm)	27 (684)
Ext. Length in (mm)	45.3 (1151)
Height in (mm)	26.5 (674)
Carton Length in (mm)	28.3 (720)
Carton Width in (mm)	21.7 (550)
Carton Height in (mm)	28 (710)
Unit Weight lbs (kg)	213 (96.6)
Shipping Weight with Cord lbs (kg)	234 (106)

